


SAURUS VERTICAL DOCK LEVELER Features

- Ideal for situations with minimal height difference between the warehouse floor and vehicle floor;
- Frame integration with bumper;
- Suitable for internal transport equipment with low ground clearance;
- Lifetime-guaranteed, robust, open-lip hinge;
- Enhanced safety with slip-resistant drop-pattern steel surface;
- Compact design for minimal maintenance;
- Easy installation in the loading area;
- Various capacities.

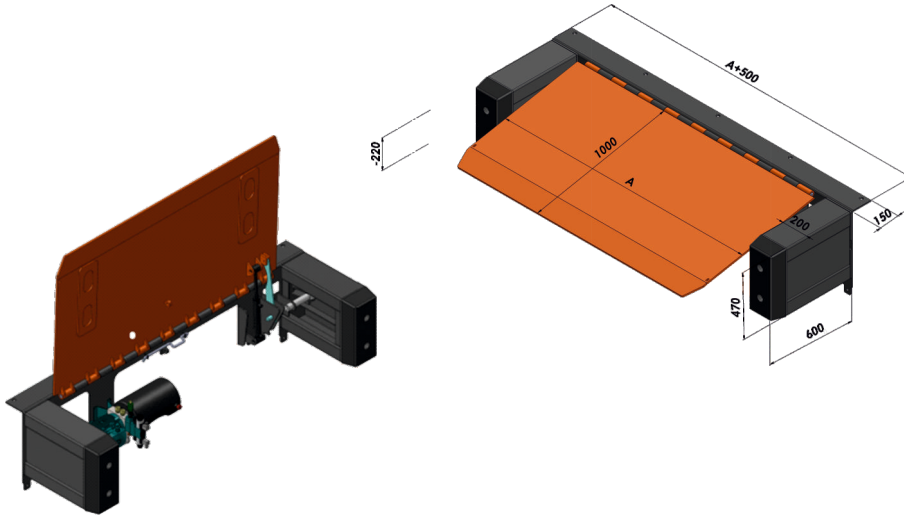

Load Capacity	7, 9 tons
Hinged Lip Features	
Hinged Lip Drop Pattern Sheet	12/13 mm, 15/16 mm
Hinged Lip Drop Pattern Sheet Material	st52-3 - S275JR
Hinged Lip Length	1000 mm
Buffers	Rubber, Steel and Roller Bumpers
Refuge Zone	Length 300-500 mm Height 470 mm
Control Unit Protection Class	IP 54
Hydraulic Oil Temperature Range	-20 °C / +40 °C
Magnetic Valves	24 VDC
Motor Power	400 V - 3 Phase 0,75 Kw
Standards	European Standard EN 1398 American ANSI+30.1

OPTIONS

